


ALUMINIUM PROFILED SHEET EDGE CLAMP BFK

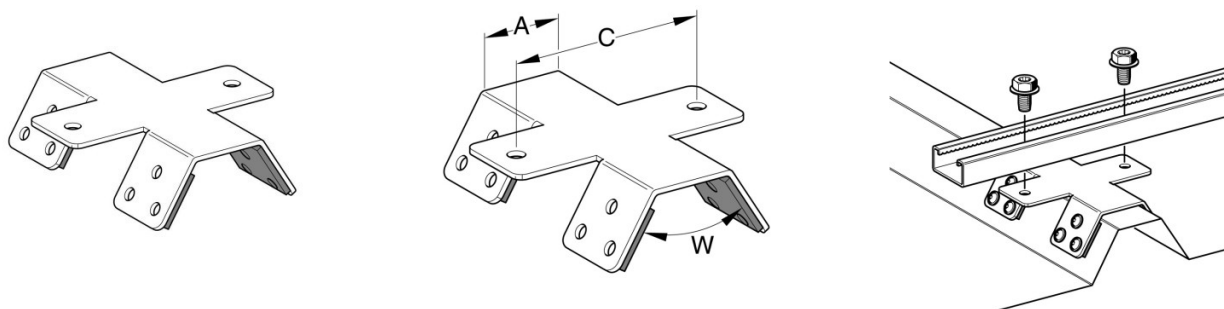

APPLICATION

Clamp for aluminum-profiled roof sheet to fix Channel 41.

SCOPE OF DELIVERY

Clamp with clamping screw and one hex-drive bit per packaging unit included.

INSTALLATION

1. Position the clamp to the edge seam and tighten it up to 17 Nm;
2. Apply the channel and fix it with Flange Screw M10x15.

TECHNICAL DATA

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Max. perm. load vertical to the roof: 1.5 - 4.0 kN depending on the roof structure

Edge seam thickness: ≤ 7.0 mm

Material: Aluminium.

| Codice | Nome | Peso | Numero di pezzi |
|--------|----------|------|-----------------|
| 111468 | TBH1 HCP | 0.28 | 10 |

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com