

**Prosystem Italia Srl**

Via Friuli Venezia Giulia, 15  
30030 Pianiga (VE) Italy  
Tel. +39 041 5101622  
Fax. +39 041 5131351


P. Iva 03470750278  
Reg.Imp. Ve 03470750278  
Cap. Soc. Euro 90.000,00  
REA Padova n° 311219

[www.prosystemitalia.com](http://www.prosystemitalia.com)  
[info@prosystemitalia.com](mailto:info@prosystemitalia.com)



U-HOLDER SB F 80 - [prosystemitalia.com](http://prosystemitalia.com)

## U-HOLDER SB F 80 - Group A439

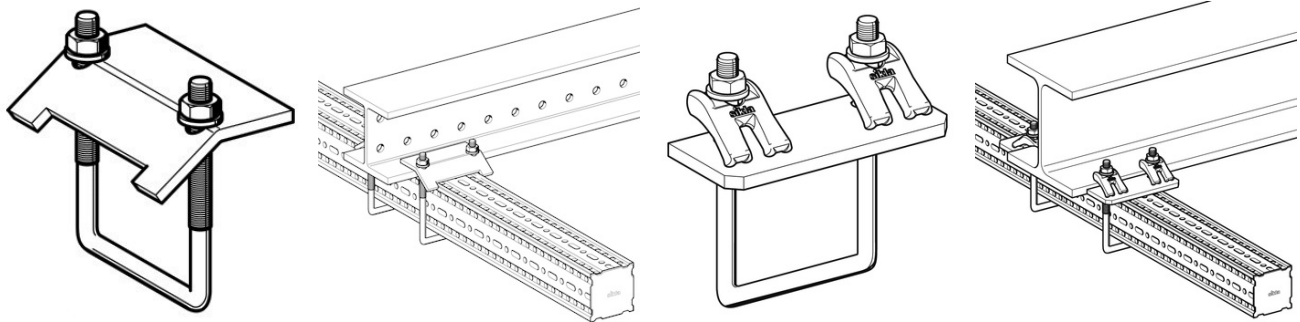

### Application

Pre-assembled component to clamp Beam Section F 80 to the flange side of traditional steel sections.

### Scope of delivery

Type SB F 80-16:

- Holder with thread M10;
- Plate;
- 2 Hexagon nuts M10;
- 2 Washers.

Type SB F 80-40:

- Holder with thread M12;
- Plate;
- 2 Beam Clips SPA 5P AU;
- 2 Hexagon nuts M12.

### Installation

U-holder to be used in pairs.

Type 16 up to flange thickness 16 mm

Type 40 up to flange thickness 40 mm

### Technical Data

| Type       | Thread | Max. adm. tensile load | Tightening torque |
|------------|--------|------------------------|-------------------|
| SB F 80-16 | M10    | 8,5 kN                 | 40 Nm             |
| SB F 80-40 | M12    | 16,0 kN                | 85 Nm             |

Material: Steel, HCP.

| Tipo          | Kg   | Pezzi per confezione | Codice Articolo |
|---------------|------|----------------------|-----------------|
| SB F 80/16 mm | 0.58 | 20                   | 192683          |
| SB F 80/40 mm | 1.45 | 10                   | 194010          |